



YSI Environmental

## YSI Professional Plus *Quatro* Cable

*The Quatro Cable with the Pro Plus Provides the Ultimate Handheld Multiparameter Instrument*



*The Quatro cable bulkhead shown with four user-replaceable sensors including temperature/conductivity, DO, pH, and ammonium.*

The Quatro is a new 4-port cable and bulkhead for the Professional Plus handheld instrument making it possible to measure conductivity and temperature, dissolved oxygen, and your choice of any two ISE's among pH, ORP, ammonium, nitrate or chloride.

All sensors are rugged and designed for true field work to reduce the overall cost of ownership.

- Holds four user replaceable Professional Series sensors for temperature/conductivity, dissolved oxygen and a choice of any two ISE's among pH, ORP, ammonium, nitrate or chloride.
- Rugged and waterproof Military Spec (MS) connectors to connect to the Professional Plus instrument.
- Choose either polarographic or galvanic DO sensors.
- Weighted guard ensures correct depth while protecting the sensors.
- 2-year cable warranty
- Choose among 1-, 4-, 10-, 20- and 30-meter cable lengths.
- Cable management kit included on any cable 4-meters or longer.



The Professional Plus with the Quatro 4-port cable enables you to conveniently sample an entire suite of parameters and easily download that data into the Data Manager desktop software.

As always, the Pro Plus comes with the communications saddle, USB cable, and Data Manager. By adding the Quatro, you can create a one-of-a-kind handheld multiparameter instrument.

To learn more about the Pro Plus visit [www.ysi.com/proplus](http://www.ysi.com/proplus).

Pure  
Data for a  
Healthy  
Planet.®



**TTT Environmental**  
Instruments and Supplies

*The preferred source for instrument  
Rentals, Sales, Service and Supplies!*

4201 B Street  
Anchorage, AK 99503  
(907) 770-9041

[www.tttenviro.com](http://www.tttenviro.com)

25420 74<sup>th</sup> Avenue S.  
Kent, WA 98032  
(253) 373-9041

[info@tttenviro.com](mailto:info@tttenviro.com)



+1 937 767 7241

800 897 4151 (US)  
www.yssi.com

YSI Environmental  
+1 937 767 7241  
Fax +1 937 767 9353  
environmental@yssi.com

YSI Integrated Systems  
+1 508 748 0366  
systems@yssi.com

SonTek/YSI  
+1 858 546 8327  
inquiry@sontek.com

YSI Gulf Coast  
+1 225 753 2650  
environmental@yssi.com

AMJ Environmental  
+1 877 392 9950  
amj@yssi.com

YSI Hydrodata (UK)  
+44 1462 673 581  
europe@yssi.com

YSI Middle East (Bahrain)  
+973 1753 6222  
halsalem@yssi.com

YSI (Hong Kong) Limited  
+852 2891 8154  
hongkong@yssi.com

YSI (China) Limited  
+86 532 575 3636  
beijing@yssi-china.com

YSI Nanotech (Japan)  
+81 44 222 0009  
nanotech@yssi.com

YSI Australia  
+61 7 390 17233  
acorbett@yssi.com

YSI India  
+91 989 122 0639  
sham@yssi.com

ISO 9001  
ISO 14001

Pure Data for a Healthy Planet and  
Who's Minding the Planet? are registered  
trademarks of YSI Incorporated.

©2008 YSI Incorporated  
Printed in the USA 1208 W4-01



YSI incorporated  
Who's Minding  
the Planet?™

## Quatro Cable Specifications

Weight (1-meter cable with sensors)	525 grams (1.15 lbs)
Diameter	4.70 cm (1.85 in)
Probe Guard Length	12.65 cm (4.98 in)
Connector	Military spec (MS), waterproof, bayonet lock

## Quatro Ordering Information

605790-1	1-m cable with 4-ports and 5560 temp/conductivity sensor
605790-4*	4-m cable with 4-ports and 5560 temp/conductivity sensor
605790-10*	10-m cable with 4-ports and 5560 temp/conductivity sensor
605790-20*	20-m cable with 4-ports and 5560 temp/conductivity sensor
605790-30*	30-m cable with 4-ports and 5560 temp/conductivity sensor
6050000	Professional Plus instrument (the Quatro can only be used with the Professional Plus)
605202	Galvanic dissolved oxygen sensor
605203	Polarographic dissolved oxygen sensor
605101	pH sensor
605102	ORP sensor
605104**	Ammonium ISE, NH <sub>4</sub> <sup>+</sup> sensor (17-meter maximum depth)
605105**	Chloride ISE sensor (17-meter maximum depth)
605106**	Nitrate ISE sensor (17-meter maximum depth)


## Accessories Ordering Information

5913***	1.25 mil PE membranes for galvanic (6 yellow caps/solution)
5908***	1.25 mil PE membranes for polarographic (6 yellow caps/solution)
5914	2 mil PE membranes for galvanic (6 blue caps/solution)
5909	2 mil PE membranes for polarographic (6 blue caps/solution)

Please visit [www.yssi.com/accessories](http://www.yssi.com/accessories) for a full line of Professional Series accessories and calibration solutions.

\* Includes cable management kit. \*\* Freshwater only. \*\*\* Standard membranes.

The waterproof, military spec connector is designed for true field performance. All YSI cables are designed for rugged field use.

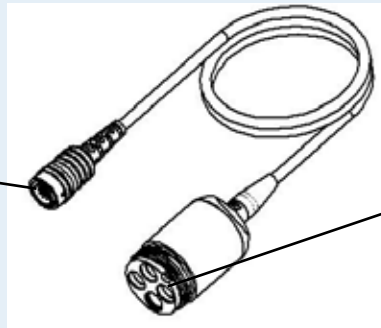

Four ports for user-replaceable sensors. Ports accept a temperature/conductivity combo sensor, DO sensor, and any combination of two ISE sensors among pH, ORP, ammonium, chloride, or nitrate. If a port isn't used simply put a port plug in its place.



A cable management kit is included with all cables 4-meters and over. Conveniently, manage your longer cable lengths. Also easily attaches to the outside of the soft-sided carrying case instead of placing wet, dirty cables inside.



All user-replaceable sensors feature a double o-ring creating a waterproof connection and enabling the sensors to be used at depths up to 30-meters.



A rugged, weighted probe guard protects the sensors and ensures the correct depths on longer cables.